







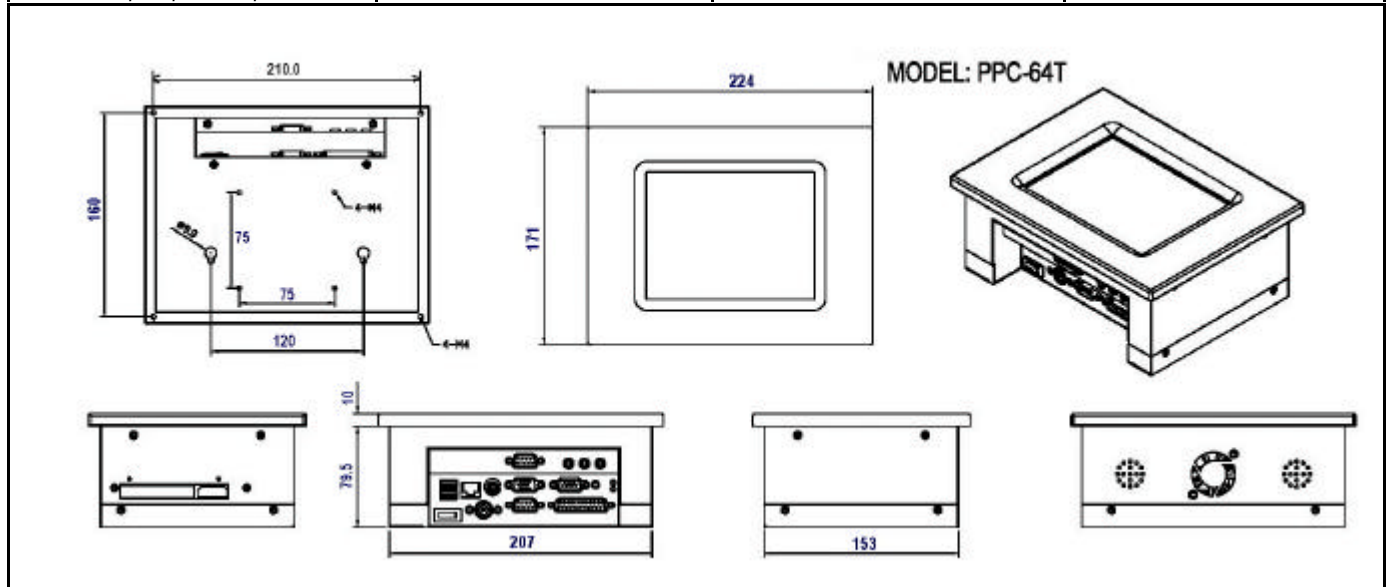


# PPC-64T 6.4" Panel PC with Low Power 800Mhz CPU with VGA / LAN / Audio / 4xCOM / 2xUSB

 <p><b>Ultra thick solid Aluminum Alloy</b> IP-65, NEMA 4, VESA-75, 100</p>	 <p><b>Cable-Less Design for best</b> <b>Vibration &amp; Shock resistant</b></p>	 <p><b>Tapped screw holes,</b> <b>VESA 75 and 100,</b></p>	 <p><b>fill water into panel until full</b></p>
 <p><b>USB, LAN, Audio, 4xCOM,</b> <b>Printer, KB, Mouse, 2xPCI</b></p>	 <p><b>Screw mount</b></p>	 <p><b>Quick wall-mounted Kit</b> <b>For size of 10.4" and up</b></p>	 <p><b>100% Water-Resistant Test on</b> <b>front panel for 7 days</b></p>



## PIII 6.4" TFT Panel PC with 800Mhz CPU/ LAN / 4 x COM / 2 x USB /Audio

### LCD Display

6.4" color TFT LCD, 640 x 480 resolution with 250 - 300 cd/m2 brightness

### CPU - Low Power 800Mhz

P-III equivalent **Low power** 800Mhz CPU soldered on board

### System Chipset

VIA VT8606 Northbridge and VIA686B

### System Memory : (Optional)

Support up to 512MB capacity RAM memory

### Touch Panel : (Optional)

Long life 5-Wire Resistive touch screen optional

### Front Bezel

Thick 8mm solid Aluminum-alloy, with highest level surface treatment

### Housing & Wall-mounting

Rugged 1.2mm thick steel metal sheet with white painting  
VESA -75 compliant

### Water-Resistant on Front Panel

Meet IP-56, 65, NAMA 4, 12 water resistant

### Surface Treatment of Front Panel

Super high-end polish, sand-blast, hairline anodizing treatment. Standard color is Stainless Steel silver Color or Black

### HDD : (Optional)

20 or 30GB slim size HDD is optional

### Disk On Module - (Optional)

Support DOM up to 512MB (optional)

### Serial ports : 4 x COM ports

( 3 x RS232 ports and 1 x RS232/422/485)

1 x COM was assigned for touch screen

### USB port : 2 x USB ports

### Quick wall-mount Kit – special design

Nagasaki Special design quick wall-mount kit

Parallel Port : LPT port for Printer connection.

Keyboard and Mouse : One PS/2 KB Mouse

### Audio – built in high quality speakers

Built in high quality speakers, Microphone jack, Line-in jack

### Ethernet Network Controller

Realtek 8139C, support 10/100 Mbp, auto-negotiation, auto-switch LAN

### VGA - Display Controller Chipset

Trident chipset support AGP 4X LCD/CRT with 32MB share Video memory, 3D/2D support  
DVD MPEG-2 : support DVD video playback

### Vibration-Resistant Design

**Excellent cable-less design** for vibration and shock resistant ability,  
5 - 17 Hz, 0.1" double amplitude displacement,  
17-500 Hz, 1.5G acceleration peak to peak

### Shock-Resistant Design

10G acceleration peak to peak (11 msec. Durat.)